


## Universal Stripper – Crimper



### UNIC-LZ

This electro-pneumatic stripper-crimper is designed for quick and reliable processing of loose Z+F twin ferrules in the range of 2 x 0.5 up to 2 x 1.5 mm<sup>2</sup> (AWG 2 x 20 – 2x 16) with a crimping length of 8 mm.

- ⇒ Electro pneumatically driven stripping and crimping machine
- ⇒ Touch screen offers easy menu navigation and display
- ⇒ No tooling time or tool change
- ⇒ Short cycle time
- ⇒ Batch counter (reset possible)
- ⇒ Adjustable stripping unit
- ⇒ Crimp quality conforms to DIN 46228

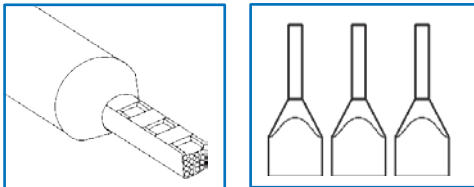

Standard: Trapezium

Verarbeitbare Aderendhülsen Usable ferrules
für lose Z+F Zwilling-Aderendhülsen for loose Z+F twin ferrules
2 x 0.5/8N
2 x 0.75/8N
2 x 1/8N
2 x 1.5/8N

Technische Daten Technical data	UNIC-LZ
Crimpbereich Crimping range	2 x 0.5 – 2 x 1.5 mm <sup>2</sup> (AWG 2 x 20 – 2 x 16)
Crimplänge CL Crimping length CL	8 mm (0.31 in.)
Einfüßlänge Infeed length	35 mm (1.38 in.)
Taktzeit ca. Cycle time approx.	1.5 s
Anschluss Power supply	100 – 240/50 – 60/110 V/Hz/VA
Druckluftanschluss Air pressure	5.5 bar (79.77 psi)
Abmessungen (B x T x H) Dimensions (w x d x h)	390 x 330 x 460 mm (15.4 x 13 X 18.1in.)
Gewicht Weight	31 kg (68.34 lbs.)
Bestell-Angaben Order specifications	On Request